



高信頼性反射防止膜

ex. 波長1480nm対応膜

分光片面反射率チャート

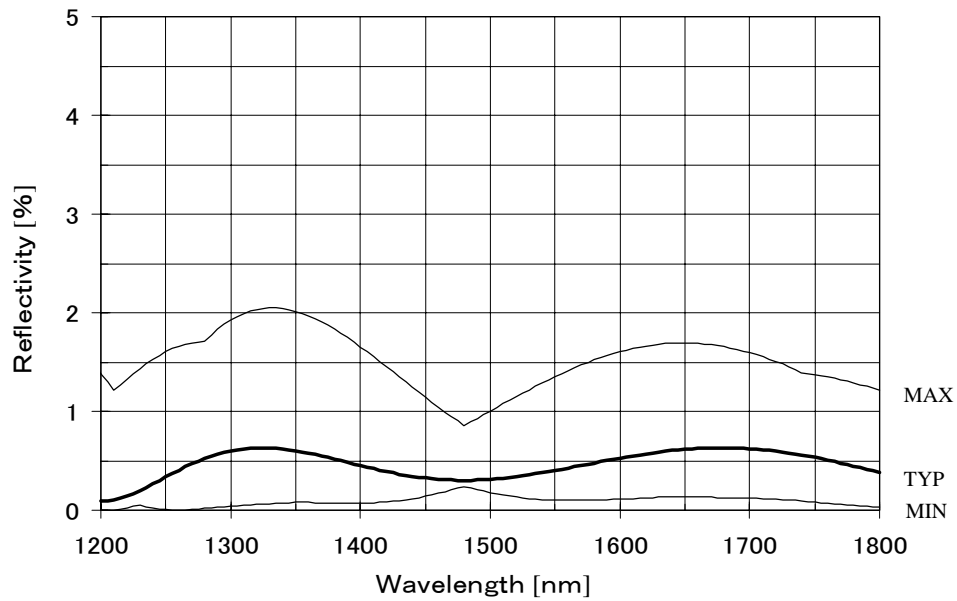

分光両面透過率チャート

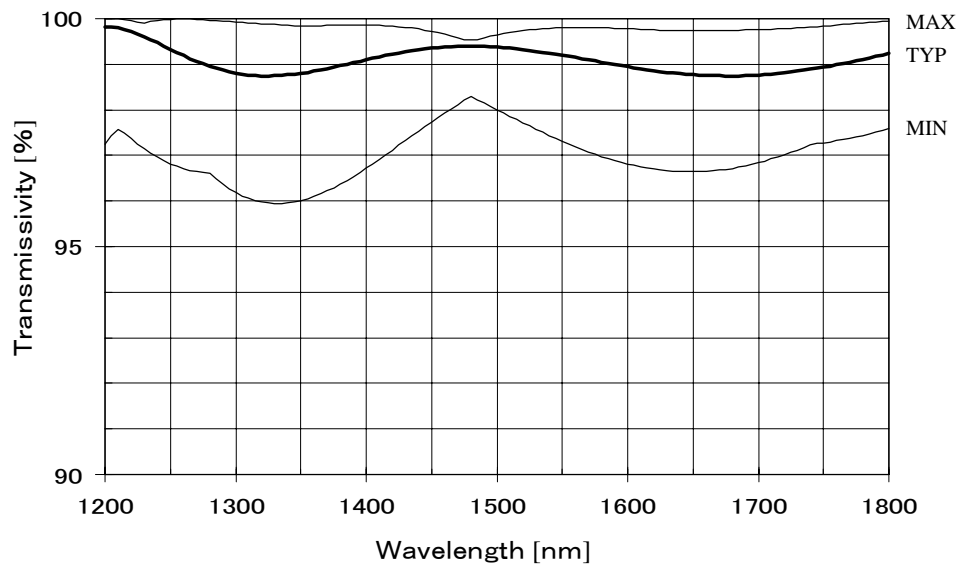

特性代表値

| 波長 [nm] | 片面反射率 [%] | | 両面透過率 [%] | |
|------------|-----------|------|-----------|-------|
| | TYP | MAX | TYP | MIN |
| 1460 | 0.31 | 1.04 | 99.38 | 97.93 |
| 1470 | 0.31 | 0.95 | 99.39 | 98.11 |
| 1480 | 0.30 | 0.86 | 99.40 | 98.29 |
| 1490 | 0.31 | 0.93 | 99.39 | 98.15 |
| 1500 | 0.31 | 1.00 | 99.38 | 98.00 |
| 1510 | 0.32 | 1.08 | 99.35 | 97.86 |
| 1520 | 0.34 | 1.15 | 99.32 | 97.71 |
| 1530 | 0.36 | 1.22 | 99.29 | 97.57 |
| 1540 | 0.38 | 1.29 | 99.24 | 97.44 |
| 1550 | 0.40 | 1.35 | 99.20 | 97.31 |
| 1560 | 0.43 | 1.42 | 99.15 | 97.19 |
| 1570 | 0.45 | 1.47 | 99.10 | 97.08 |